





Zip-Tile™

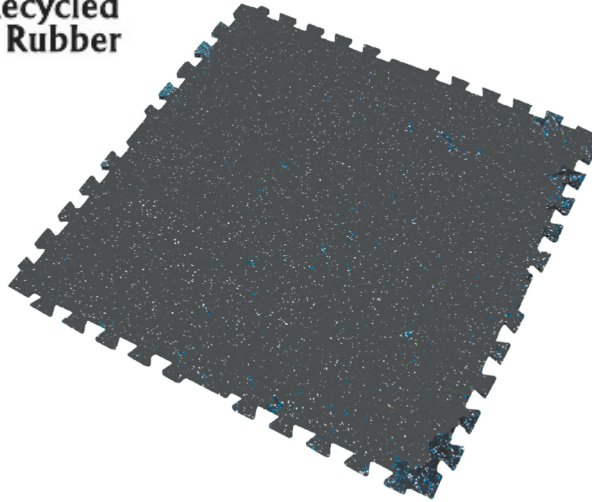

Our company is pleased to offer **Zip-Tile**. It is the newest inter-locking flooring-product. The **Zip-Tile** maintains our strict requirements for performance, durability, appearance and ease of installation. The unique tab design holds the tiles together securely without the need of expensive adhesives, tapes or the labor to apply them.

Zip-Tile is the answer to your special purpose and fitness flooring needs. The non-slip surface is easy to clean and maintain, and will be your flooring solution for many years to come. **Zip-Tile** is manufactured in the USA from recycled scrap tires and backed by our factory warranty.

Installation is as easy as aligning the tabs and pressing together with your fingers or using a rubber mallet. The unique tab design allows for a square or brick installation pattern. The **Zip-Tiles** can also be disassembled and re-assembled time and again without damaging the tiles.

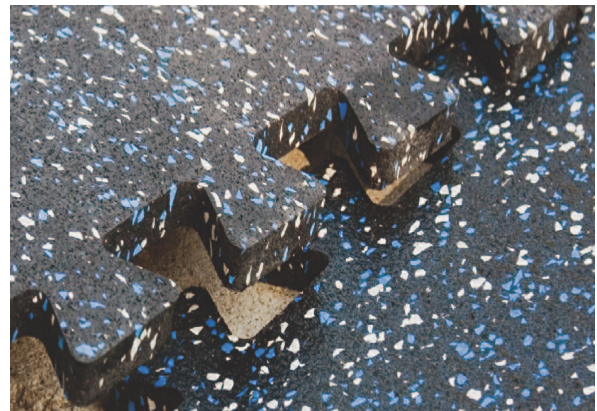


Custom Colors




1.5"


Standard Colors




Blue/Gray



Yellow Flec




Red Flec



Blue Flec



Grey Flec



Green Flec

Aesthetically Pleasing. The **Zip-Tile** is available solid black, standard colors or a variety of custom colors.

Factory Cut Edges: to assure a uniform and simple installation.

Safe for Indoor and Outdoor Use

Cleaner can be used to sanitize mats.
 Provides Excellent Traction-even when wet!
 Manufactured in the USA.
 Manufactured of 100% Premium Recycled Rubber.
 Easily Cleaned: Indoor cleaning involves a broom, damp sponge, mop or vacuum cleaner. For outdoor uses, a water hose, leaf blower or broom is sufficient.



Zip TileTM

TYPICAL PROPERTIES

Colors:	Solid black, 6 standard colors and a variety of custom colors	
Material:	SBR bonded granular black recycled rubber with or without EPDM	
Dimensions:	Thickness 3/8" (9.5mm) +/- .005	
Sizes:	22.5" x 22.5" & 28.5" x 28.5"	
Density:	ASTM D-3676	60 lb/ft ³ /980/kg/m ³
Shearing Strength:	<.06 (N/mm ²)	
Tensile Strength:	<1.80 (N/mm ²)	

INSTALLATION

Zip-Tiles can be installed easily over nearly any smooth surface including concrete, asphalt, wood or tile. No special tools are required.

WARRANTY

Rolled Rubber is guaranteed to be free of manufacturing defects in material and workmanship for 2 years. For warranty details, visit our website at www.ngt-recycledrubber.com.

Our company is a dynamic manufacturing company that sells high quality, durable rubber flooring and other protective surfaces and products made from recycled tires. For over 20 years, our company has combined superior products with exceptional customer service to become one of the most successful recycled rubber flooring manufacturers in North America.

